



# KM 40

## AIR DUCT MODULE

### Air treatment · Calculated · Effective

**UVpro KM** air duct devices are designed for first-time or subsequent installation in supply and exhaust air ducts. Air volume and other influencing parameters determine the number of required devices. Software-based calculation of the treatment efficiency. Easy installation and maintenance with maximum UVC output.

---

For supply and exhaust air ducts

---

Easy installation, also subsequently


---

Number and type of lamps according to calculation

---

Proven technology for long-lasting use

---

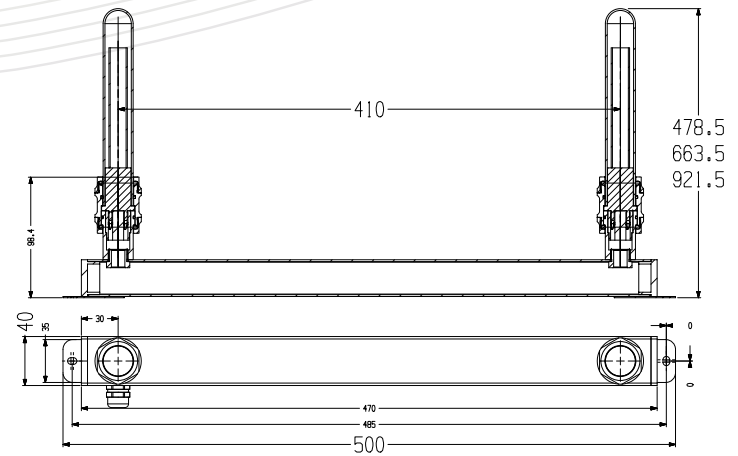

#### SPECIFICATIONS

Short name	UVpro KM		
In conformity with requirements	EMC, CE, IP66		
Material	stainless steel: WN 1.4301 and WN 1.4305		
Operating temperature [°C]	0...+40		
Type [duo]	UVpro KMD 40		
Suitable UVpro lamp	UVpro K(T)20-4	UVpro K(T)30-4	UVpro K(T)40-4
Input power [W]	42	62	82
Current flow [mA]	210	290	390
Total UVC output [ $W_{253,7\text{nm}}$ ]	14	22	32
Lamp intensity at 1 m [ $\mu\text{W}/\text{cm}^2$ ]	65	95	150
Lamp length from screw joint [mm]	371	556	814
Weight [kg]	3.3	3.35	3.43
Screw joint, wrench size [mm]	34		
Lamp replacement interval [h]	12000 (75%±5% output performance)		
Life expectancy electronics	> 10 years		
Supply voltage [ $V_{AC}$ ]	220-240 (50-60 Hz)		
Power cable length [m]	10 (length customisable)		

#### Application Optimised UV for



Food & Beverage  
Industrial UV



Healthcare  
Industrial UV



Pharmaceuticals  
Industrial UV



#### Canada

+1 980.256.5700  
americas@nuvonicuv.com

#### Mexico

+1 980.256.5700  
americas@nuvonicuv.com

#### China

+86 21 61679599  
apac@nuvonicuv.com

#### United Kingdom

+44 1753 515300  
emea@nuvonicuv.com

#### Germany

+49 (0)2268 908300  
germany@nuvonicuv.com

#### USA

+1 980 256 5700  
americas@nuvonicuv.com

#### Malaysia

+60 16 440 8834  
sea@nuvonicuv.com